



Production Printer

VALEZUS T1200

HIGH-SPEED FULL-COLOR CUT-SHEET INKJET PRESS



Print Speed

165 ppm

A4 long-edge feed

AFP / IPDS /
PS / PDF
compatible

VALEZUS T1200

The perfect solution for both short and long run transactional printing, offering the flexibility to meet current and future market requirements

Are you looking for a production printer that combines excellent cost performance with the flexibility to meet the varying job demands that large continuous feed printers find difficult to handle efficiently?

VALEZUS T1200 is the ideal solution to your needs, delivering the incredible high print speed of 165 pages per minute* in color, combined with low investment for installation, space-saving and environmental friendliness.


This compact printer, which supports AFP/IPDS, PS and PDF formats, is designed for easy integration into your current workflow. VALEZUS T1200 creates new business opportunities for you in the diversifying transactional print market.

* 165 ppm in the case of simplex A4 long-edge feed

Inline Finishing Configuration

In addition to usual stacking printing.

VALEZUS T1200 can also be used for staple, Booklet (half-fold with staple), punch and inline finishing.

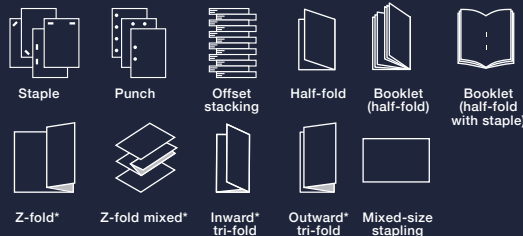

*With folder Unit FG20



High productivity to meet tight deadlines

VALEZUS T1200, a compact production printer achieving one of the very highest productivity figures in its class. Its flexibility offers fast and easy print job changeover, with the benefits of cutsheet output. These advantages allow you to meet even the tightest of deadlines in this demanding market.

VALEZUS T1200






Easy integration for uninterrupted current workflow

TagG QStream controller supports native IPDS workflow, and EFI™ Fiery® controller, used widely across the production printing industry, are available. This helps ensure the VALEZUS T1200 installation is smooth and without change to your current workflow.



Optimise transactional printing with COLD printing technology

Taking advantage of RISO's integrated production of hardware, software, and consumables, we have developed a new high-concentration ink that enables even higher printing density. RISO's proprietary oil-based ink eliminates the need for heaters to dry the ink, enabling us to greatly reduce the overall footprint and energy consumption of our devices. Furthermore, the absence of heat during our print process means the paper won't curl or ripple, and post-print processes run far more smoothly with our output.



Space-saving and maximized productivity

The VALEZUS T1200 is a very compact production printer for its incredible output speed, which means it can be placed, if required, beside a post-print processing device or a larger continuous feed machine to handle reprint applications. The compact-sized printer is designed to ensure that operators are always close to all key areas of the machine, therefore improving work efficiency.




Easy installation and quick return on investment

The VALEZUS T1200 eliminates the need to install ducting for temperature control, heat or fumes extraction and operates on standard type power supply. The intuitive interface makes it quick and easy for you to get it up and running. RISO has made all the various costs normally associated with installing hardware as minimal as possible.




Dimensions

[Front View]

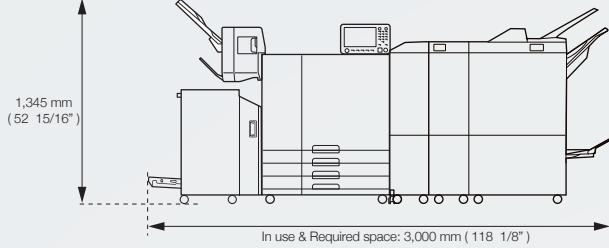

[Side View]



Specifications

Print Type	Line-type inkjet system		
Ink Type	Oil-based pigment ink (Cyan, Magenta, Yellow, Black, Gray)		
Print Resolution	Black: 600 dpi (main scanning direction) × 600 dpi (sub-scanning direction), Cyan, Magenta, Yellow, Gray: 300 dpi (main scanning direction) × 300/600 dpi (sub-scanning direction)		
Number of Gray Levels	Black: 4 gray levels Cyan, Magenta, Yellow, Gray: 12 gray levels		
Warm-up Time	2 min. 30 sec. or less (at room temperature of 23 °C (73.4 °F))		
First Print Time *1	14 sec. or less (A4 long-edge feed)		
Continuous Print Speed *2	A4 long-edge feed	Simplex: 165 ppm Duplex: 82 sheets/minute (164 ppm)	
	Letter long-edge feed	Simplex: 160 ppm Duplex: 80 sheets/minute (160 ppm)	
	A4 short-edge feed	Simplex: 120 ppm Duplex: 60 sheets/minute (120 ppm)	
	Letter short-edge feed	Simplex: 120 ppm Duplex: 60 sheets/minute (120 ppm)	
	B4 (JIS) short-edge feed	Simplex: 102 ppm Duplex: 44 sheets/minute (88 ppm)	
	Legal short-edge feed	Simplex: 104 ppm Duplex: 44 sheets/minute (88 ppm)	
	A3 short-edge feed	Simplex: 88 ppm Duplex: 42 sheets/minute (84 ppm)	
	Ledger short-edge feed	Simplex: 86 ppm Duplex: 42 sheets/minute (84 ppm)	
Paper Size	High Capacity Feeder	Maximum: 340 mm × 460 mm (13 3/8" × 18 1/8") Minimum: 90 mm × 148 mm (3 9/16" × 5 13/16")	
	Feed Tray	Maximum: 297 mm × 432 mm (11 11/16" × 17") Minimum: 182 mm × 182 mm (7 3/16" × 7 3/16")	
	Face Down Finisher	Without offset Maximum: 340 mm × 465 mm (13 3/8" × 18 5/16") Minimum: 90 mm × 148 mm (3 9/16" × 5 13/16")	
		Offset output Regular-sized paper width: 182 mm × 257 mm - 297 mm × 431.8 mm (7 3/16" × 10 1/8" - 11 11/16" × 17") Irregular-sized paper width: 131 mm × 148 mm - 305mm × 465mm (5 3/16" × 5 27/32" - 12" × 18 5/16")	
	Multifunction Finisher	Top Tray	Maximum: 330 mm × 465 mm (13" × 18 5/16") Minimum: 100 mm × 148 mm (3 15/16" × 5 13/16")
		Stacking Tray	Maximum: 330 mm × 465 mm (13" × 18 5/16") Minimum: 148 mm × 148 mm (5 13/16" × 5 13/16")
Stapling		Maximum: 297 mm × 432 mm (11 11/16" × 19 3/16") Minimum: 182 mm × 148 mm (7 3/16" × 5 13/16")	
Booklet Tray		Maximum: 330 mm × 465 mm (13" × 18 5/16") Minimum: 182 mm × 257 mm (7 3/16" × 10 1/8")	
Printable Area	314 mm × 458 mm (12 11/32" × 18 1/32")		
Guaranteed Print Area *3	Standard: Margin width of 3 mm (1/8") Maximum: Margin width of 1 mm (3/64")		
Paper Weight	High Capacity Feeder	46 gsm to 210 gsm (12-lb bond to 56-lb bond)	
	Feed Tray	52 gsm to 104 gsm (14-lb bond to 28-lb bond)	
Paper Tray Capacity	High Capacity Feeder	Height up to 440 mm (17 5/16") (4,000 sheets)*4	
	Feed Tray	Height up to 56 mm (2 3/16") (500 sheets × 3 trays)*4	
Output Tray Capacity	Face Down Finisher	Height up to 108 mm (4 1/4") (1,000 sheets)*4 *5	
	Multifunction Finisher	Top Tray	Height up to 50 mm (1 31/32") (500 sheets)*4 *5
		Stacking Tray	Height up to 200 mm (7 7/8") (2,000 sheets)*4 *5
		Booklet Tray	Height up to 50 mm (1 31/32")
Network Interface	Ethernet 1000BASE-T, 100BASE-TX, 10BASE-T		
Memory Capacity	4 GB		
SSD (Solid State Drive) *7	Capacity	512 GB	
	Available Space	Approx. 370 GB	
Operating System	Linux*		
Power Source	AC 100 V - 240 V, 17.7 A - 9.0 A, 50 Hz - 60 Hz		
Power Consumption as a system	Maximum: 1,760 W Ready : 230 W or less, Sleep *9 : 3.3 W or less, Stand-by: 1.7 W or less, In printing: 1,050 W or less		
Operating Noise as a system	Maximum: 68 dB (A) A4 long-edge feed (Simplex) at the maximum print speed		
Operating Environment	Temperature: 15 °C to 30 °C (59 °F to 86 °F) Humidity: 40% to 70% RH (non-condensing)		
Dimensions (W × D × H) as a system	In use: 3,000 mm × 735 mm × 1,345 mm (118 1/8" × 28 15/16" × 52 15/16")		
Required Space (W × D × H) as a system*10	3,000 mm × 1,325 mm × 1,345 mm (118 1/8" × 52 5/32" × 52 15/16")		
Weight as a system	Approx. 471 kg (1,038 lb)		

*1 Within 10 minutes after the last print job.

*2 When using plain paper and recycled paper (85 gsm (23-lb bond)), and standard density setting. Chart used: Print measurement pattern [Color measurement sample 2 (JEITA standard pattern J6)].

*3 The margin when printing envelopes is 10 mm (13/32"). The guaranteed area when printing images is the area enclosed within 3 mm (1/8") of the edges of the paper.

*4 When using plain paper and recycled paper (85 gsm (23-lb bond)).

*5 Height up to 110 mm when short edge is less than 182 mm (7 3/16") or long edge is less than 257 mm (10 1/8").

*6 Not applicable to less than B5 size (182 mm × 257 mm (7 3/16" × 10 1/8")) paper.

*7 One gigabyte (GB) is calculated as 2³⁰ bytes.

*8 Without printing and temperature adjustment operation.

*9 When setting [Power Consumption (In Sleep)] to [Low].

*10 With the front cover open and the operation panel in the upright position.

Notes: Specifications are subject to change without notice.

ComColorExpress FS2100C

CPU	Intel® Core™ i3-8100 3.60 GHz
Memory Capacity	8 GB
Storage Capacity	Boot Drive 256 GB SSD/Data Drive 500 GB HDD
Operating System	Windows® 10 IoT Enterprise 2019 LTSC
Network Interface	2 ports (Ethernet: 10BASE-T/100BASE-TX/1000BASE-T)
Power Source	AC 100 V - 240 V, 1.5 A - 1.0 A, 50 Hz - 60 Hz
Power Consumption	Max. 80 W / Ready 30 W
Dimensions (W × D × H)*	204 mm × 248 mm × 384 mm (8.0" × 9.75" × 15.1")
Weight	Approx. 6 kg
PDL (Page Description Language)	PostScript® 3 (CPSI:3020), PDF (1.3, 1.4, 1.5, 1.6, 1.7, 2.0), PDF/VT, EPS, FreeForm, FreeForm2, Enhanced PCL6/PCL5, TIFF6.0, PPM3.0, Creo VPS, Fiery JDF1.8
Support Protocol	TCP/IP, Bonjour, LPR, IPP, Port 9100, FTP, SMB, Email (IMAP/POP3), PAP, WSD, USB, HTTP, HTTPs (TLS), SNMP, LDAPv3, IPv4, IPv6, IPSec
Installed Font	PS: 140 fonts PCL: 81 fonts
Supported Client Operating System	Printer Driver: Windows 10 (32-bit/64-bit), Windows 11, Windows Server® 2016, Windows Server 2019, Windows Server 2022, macOS v10.15 (Catalina), v11 (Big Sur), v12 (Monterey), v13 (Ventura) Command Work Station®: Windows 10 (64-bit), Windows 11, Windows Server 2016 (64-bit), Windows Server 2019 (64-bit), Windows Server 2022, macOS v10.15 (Catalina), v11 (Big Sur), v12 (Monterey), v13 (Ventura)

*Keep other objects at least 200 mm away from the equipment in the rear, and right and left.

QStream Controller

Starter	
CPU	Intel Core i3-12100 (4 core, 12MB cache, 4.3GHz)
Memory Capacity	8 GB RAM DDR4
Storage Capacity	1 × SSD 512 GB M.2
Operating System	Windows 10 IoT LTSC 2021
Network Interface	Ethernet : 1000 Base-T/100Base-TX/10Base-T
Power Source	Input voltage: 90-264 VAC, 47 Hz/63 Hz
Power Consumption	Input current (max): 260 W
Dimensions (W × D × H)	92.6 mm × 292.8 mm × 290 mm (3.65" × 11.53" × 11.42")
Weight	Approx. 4.48 kg (9.88 lb)
PDL (Page Description Language)	PDF Single and Multi-Pages with and without transparency Level 1.3, 1.4, 1.5, 1.6, 1.7 PDF/X-1a, PDF/X-3, PDF/X-4, PDF/X-5, PDF/VT PostScript EPS, PS level 3 Single and Multi-Pages
Support Protocol	TCP/IP, LPR, IPP, JDF/JMF

Pro	
CPU	Intel Core i5-12500 (6 core, 18 MB cache, 4.6 GHz)
Memory Capacity	32 GB RAM DDR4
Storage Capacity	1 × SSD 512 GB M.2
Operating System	Windows 10 IoT LTSC 2021
Network Interface	Ethernet : 1000 Base-T/100Base-TX/10Base-T
Power Source	Input voltage: 90-264 VAC, 47 Hz/63 Hz
Power Consumption	Input current (max): 260 W
Dimensions (W × D × H)	92.6 mm × 292.8 mm × 290 mm (3.65" × 11.53" × 11.42")
Weight	Approx. 4.48 kg (9.88 lb)
PDL (Page Description Language)	PDF Single and Multi-Pages with and without transparency Level 1.3, 1.4, 1.5, 1.6, 1.7 PDF/X-1a, PDF/X-3, PDF/X-4, PDF/X-5, PDF/VT PostScript EPS, PS level 3 Single and Multi-Pages
Support Protocol	TCP/IP, LPR, IPP, JDF/JMF, IPDS over TCP/IP

® RISO and VALEZUS are trademarks or registered trademarks of RISO KAGAKU CORPORATION in the United States and other countries. TagG and aStream are trademarks of TagG Informatique. EFI, Fiery and Command WorkStation are trademarks of Electronics For Imaging, Inc. and/or its wholly owned subsidiaries in the U.S. and/or certain other countries. Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries. Adobe and PostScript are either registered trademarks or trademarks of Adobe in the U.S. and/or other countries. macOS, AppleTalk and Bonjour are trademarks of Apple Inc. Windows and Windows Server are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. Intel and Intel Core are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Other corporate names and/or trademarks are either registered trademarks or trademarks of each company, respectively.

Copyright ©2024 RISO KAGAKU CORPORATION. All rights reserved.



RISO KAGAKU CORPORATION
5-34-7 Shiba, Minato-ku, Tokyo 108-8385 Japan
<https://www.riso.com/>